



Why Choose Regency?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do; from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

You'll be happy with your Regency for years to come, our Limited Lifetime Warranty guarantees it. Not only have we invested in quality workmanship, the finest materials and durable heavy-duty construction but we have carefully selected a dealer network that is committed to your satisfaction.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's more than a fireplace!





Why Choose A Gas Insert?

A Regency Gas Insert is a specially engineered, gas fire that slips into your existing masonry fireplace to create a high efficiency heating system with a stunning fire. This means that you will keep the majority of the heat generated by your Regency inside your home. Even when your gas insert is turned off, you will not lose heat up your chimney.

GFi350L | Greenfire™ Gas Insert • B-vent

Transform your old fireplace or blank wall into a modern efficient gas log fire. Regency GFi350L combines modern styling with the efficiency of a realistic gas log fire. Like all Regency gas inserts, the Greenfire GFi350L will fit into most existing chimneys using a simple flexible flue installation or as a reduced clearance unit into a timber framed wall.

STANDARD FEATURES

- Open flued B-vent
- Natural gas 6.1 kW – 30 MJ NG
- Enhanced driftwood log set & embers
- Ceramic Glass
- Flame Adjustment
- Powerful 3 speed fan
- FireGenie RF (Radio Frequency) remote control – with timer & thermostat function
- Electronic ignition

OPTIONS

- Propane & ULPG conversion kits
- Fascia & black inner trim with mesh guard
- Fascia & black inner trim with glass guard
- Stainless steel inner trim (suits fascia with glass guard option only)
- Black enamel inner reflective panels
- Zero clearance kit to create your own mock fireplace
- Quick Install kit for ease of installation
- 5.7 kW – 27 MJ Propane
- 4.2 kW – 21 MJ ULPG



FireGenie® RF remote control



when installed with a vertical flue kit on NG





DVi34L | Gas Insert • Direct vent

The DVi34L gas log insert is modern and contemporary styled heater that will fit into most existing fireplaces creating the ambience of a wood fire along with the efficiency and convenience of a realistic gas log fire.

STANDARD FEATURES

- Contemporary design suits multiple installation options
- Direct vent room sealed technology
- Natural gas 6.2 kW – 32 MJ NG
- Enhanced log set and embers
- Ceramic glass with invisimesh screen
- Flame adjustment
- Electronic ignition
- FireGenie RF (Radio Frequency) remote control – with timer & thermostat function
- 2-speed fan

OPTIONS

- Spacer can be used with more shallow firebox depths
- Propane & ULPG conversion kits
- Reflective Stainless Insert*
- 6.1 kW – 31 MJ Propane
- 5.3 kW – 26 MJ ULPG

* While Quantity Last



FireGenie® RF remote control



when installed with a vertical flue kit on NG



**NEW
PRODUCT!**



DV134L shown with standard fascia, spacer & mandatory dress guard.



DV134L shown with standard fascia & mandatory dress guard.



FG38/FG39 shown with optional brushed nickel louvres (shown without mandatory dress guard).

FG38 | Gas Freestanding • B-vent

The clean lines of this gas stove wraps around its extraordinary fire. This fire provides heat for large living areas but can be turned down to enjoy the fire view with less warmth. Install the FG38 and warm up your home as you lower heating bills.

STANDARD FEATURES

- Open flued B-vent
- Natural gas 6.4 kW – 34 MJ NG
- Enhanced log set and embers
- Ceramic glass
- Dress guard
- Flame adjustment (6 settings)
- Black louvres
- 3-speed fan

OPTIONS

- Brushed nickel louvres
- FireGenie® remote control
- Propane Conversion Kit
- 6.4 kW – 31 MJ Propane

• OPTIONAL •



FireGenie® RF remote control



FG38/FG39 shown with optional brushed nickel louvres (shown without mandatory dress guard).

FG39 | Gas Freestanding • *Direct vent*

This Regency gas log fire features the finest, most realistic flame picture available. Enjoy the exceptional view through the wide one piece glass door designed to showcase the glowing flames and embers. No Chimney? No Problem. With room sealed direct vent technology, you can vent up and out of your home saving money on complicated installations.

STANDARD FEATURES

- Direct vent room sealed technology
- Natural gas 8.3 kW – 40 MJ NG
- Enhanced log set and embers
- Ceramic glass
- Dress guard
- Flame adjustment (6 settings)
- Black louvres
- 3-speed fan

OPTIONS

- Brushed nickel louvres
- FireGenie® remote control
- Propane Conversion Kit
- 7.9 kW – 38 MJ Propane
- Vertical or Horizontal Flue termination

• OPTIONAL •




FireGenie® RF remote control

Specifications (mm)


Unit	Ignition System	FireGenie Remote	B-Vent Flue	Direct Vent Flue	Zero Clearance
GFi350L	electronic	✓	✓	-	★
DVi34L	electronic	✓	-	✓	-
FG38	electronic	★	✓	-	-
FG39	electronic	★	-	✓	-

- Not available
 ✓ Standard
 ★ Optional


FG38/FG39



GFi350L AND DVi34L

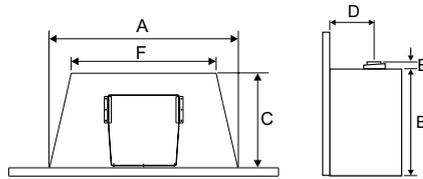

Dimensions	A	B	C	D	F
GFi350L	683	584	362	289	683
DVi34L	780	576	350	401	565
FG38	660	762	432	448	-
FG39	660	762	432	448	-




COMPLETED FACEPLATE & SPACER ASSEMBLY (DVi34L ONLY)

Width	Height	Depth
909	640	52

Faceplate Dimensions	Width	Height	Depth
DVi34L	909	640	2.7
GFi350L	908	683	28


Minimum Fireplace Opening	Width (front)	Width (rear)	Height	Depth
GFi350L	688	688	590	367
DVi34L	780	600	586	406
DVi34L (with spacer)	680	600	586	353

Mock fireplace construction Framing - zero clearance	J	K	L	M
GFi350L	650	787	420	800

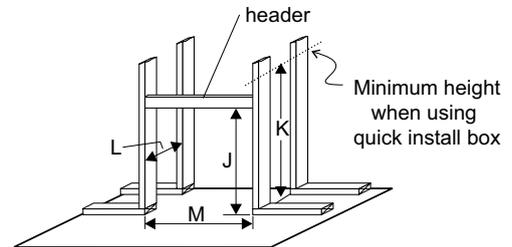


Minimum Clearances To Combustibles	A	B	C* (MIN.)
GFi350L	464	860	330
DVi34L	255	1205	330

*For other mantle clearances please check your product manual.
 A,B,C area measured from the side trim of the unit.

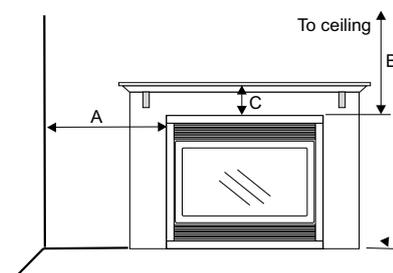

Min. Clearances to Combustibles	A	B	C
FG38	190	155	50
FG39	190	150	50

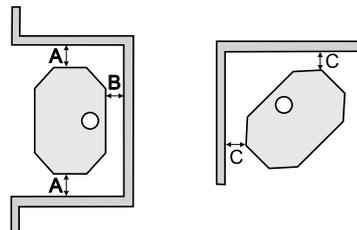

ACCESSORIES

FIREGENIE® RADIO FREQUENCY REMOTE CONTROL

Programmable up to 7 days a week. Automatically modulating the temperature of your Gas Fire, increasing efficiency & reducing running costs. Also allows you to set and maintain a desired temperature, as well as adjust the flame height and fan speed. Take full control over you flame height and fan by using manual mode.

ZERO CLEARANCE KIT

(for GF350L only)

By using a reduced clearance kit and installing into a timber framed enclosure, you can turn any blank wall into a modern efficient gas log fire.



ASTROCAP™ (for direct vent horizontal termination only)


The patented AstroCap will finish off the flue system on the outside of your home making it far more attractive than traditional flue systems. The AstroCap can even be painted to match your home.

DIRECT VENT TECHNOLOGY (FG39 ONLY)



Direct vent technology means that you can install a Regency stove almost anywhere in your home - no chimney needed. From the top or rear of the unit, simply vent your stove through an exterior wall. Direct vent means that you have sealed combustion - outside air is brought in through the vent for combustion and the combusted air is sent back out - your indoor air is not affected.

DVi34L ONLY

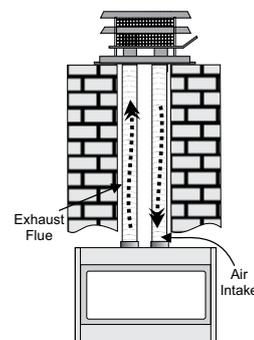

Note: When installing the flueing, identify the flues. Mark one exhaust and one intake as indicated on the top of the unit.

ENJOY YOUR REGENCY — FOR LIFE

You'll be happy with your Regency for years to come, our Limited Lifetime Warranty guarantees it. Not only have we invested in quality workmanship, the finest materials and durable heavy-duty construction but we have carefully selected a dealer network that is committed to your satisfaction. All Regency gas fires pass stringent Australian testing standards. We know that you will be as proud of your Regency as we are. Refer to owner's manual for details.

Note: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information. Stainless steel inner panels will naturally change tone over time. Heating capabilities of units are affected by: drafts under doorways or through flooring, large glass areas not covered by heavy drapes, ceiling heights greater than 2.4m or cathedral type ceilings, poor or no insulation and geographical locations.





for your nearest dealer visit:
regency-fire.com.au
or call 1 800 081 978



Fireplace Products Australia Pty Ltd.
1 Conquest Way,
Hallam VIC 3803
Australia
Phone: 1 800 081 978
Fax: 03 9799 7822
Email: sales@regency-fire.com.au

Distributor WA
Air Group Australia
28 Division St.
Welshpool WA 6106
Australia
Phone: 08 9350 2200

Distributor NZ
Aber Holdings Ltd
17 Mainstreet Place,
PO Box 10095, Te Rapa
Hamilton 3241
New Zealand
Phone: 64 7849 7585

Disclaimer: Appearance of flames varies with installation and fuel type.

©2021 FPI Fireplace Products International Ltd. Regency®, Greenfire®,
Astrocap® and Panorama™ are the registered and/or proprietary
trademarks of FPI Fireplace Products International Ltd.
All rights reserved. (03/2021)
Part no. 944-283

Your Regency Dealer